




FIREBREAK SA
SAFETY APPLIANCES PTY LTD



DOC. NO.	REVISION	ISSUE	DATE
QF/RD/05	01	00	01-10-2019

WINCH WITH UNIVERSAL BRACKET

Ref. No. PN 801(DP)(25M)

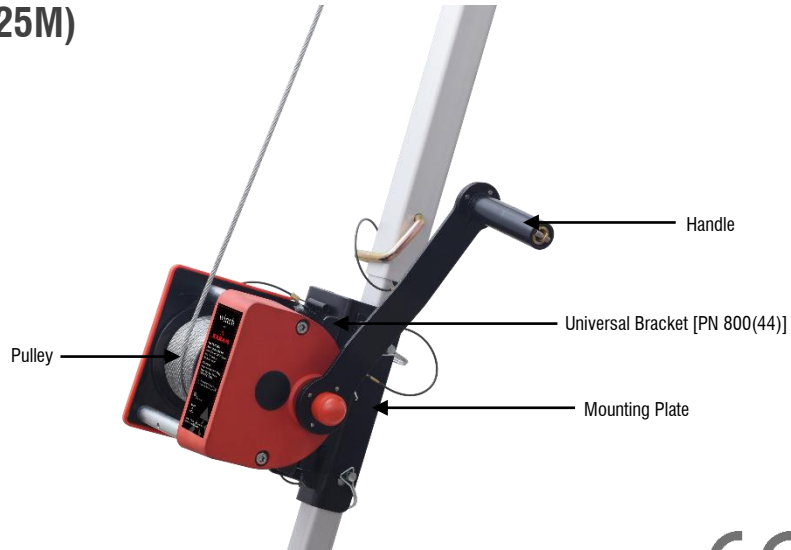

TESTED AS PER EN 1496:2006 TYPE A



DESIGN

Comes with universal mounting bracket compatible with lower bracket assembly bracket on the leg of double pulley head Tripod (PN 800DP) and Megapod for easy & quick installation on Tripod / Megapod

Material or man lifting rescue winch

Not to be used for fall arrest

Galvanized steel cable of Ø4.8 mm & length 25 m. maximum

Equipped with steel screw locking Karabiner as connector

Handle rotating mechanism for lifting or lowering

BODY

Material :

- Galvanized steel body
- Nylon molded cover & beam for wire winding

RATED LOAD CAPACITY

As per EN 1496 : 135 kg

As per Machine Directive 2006/42/EC : 250 kg

VITAL TEST COMPLIANCE

Static Strength : Tested at 13.5 kN

WEIGHT

9.56 kg ± 0.05 kg

TECHNICAL DATA SHEET